## Regolamento (UE) 2025/40 / *Regulation (EU) 2025/40*

La presente checklist costituisce la pagina iniziale del Fascicolo Tecnico PPWR e identifica la documentazione disponibile e valutata a supporto della verifica dei requisiti applicabili all'imballaggio.
*This checklist constitutes the first page of the PPWR Technical File and identifies the documentation available and reviewed to support verification of the requirements applicable to the packaging.*

### 1. IDENTIFICAZIONE / *IDENTIFICATION*

| | |
|---|---|
| **Codice prodotto Giorgio Bormac**<br>***Giorgio Bormac product code*** | Tutti gli strumenti della linea XS per il modello REVIO portatile multiparametro, si allega elenco / All instruments in the XS line for the REVIO portable multiparameter model; a list is attached |
| **Descrizione prodotto**<br>***Product description*** | Valigia con etichetta / suitcase with label |
| **Tipologia di imballaggio**<br>***Packaging type*** | ☑ Prodotto / *Product*<br>☐ Spedizione esterno / *Outer shipping*<br>☐ Spedizione interno / *Inner shipping* |
| **Data aggiornamento fascicolo**<br>***Technical file update date*** | 25.09.2026 |

### 2. DOCUMENTAZIONE PRESENTE NEL FASCICOLO / *DOCUMENTATION INCLUDED IN THE TECHNICAL FILE*

| **Documentazione / Evidenza**<br>***Documentation / Evidence*** | **Presente**<br>***Available*** | **N.A.**<br>***N.A.*** | **Riferimento documento / Note**<br>***Document reference / Notes*** |
|---|---|---|---|
| Dichiarazione PPWR del fornitore / fabbricante<br>*PPWR declaration from supplier / manufacturer* | ☑ | ☐ | |
| Scheda tecnica / specifica tecnica dell'imballaggio<br>*Packaging technical datasheet / technical specification* | ☑ | ☐ | |
| Informazioni su composizione, materiali, peso e dimensioni<br>*Information on composition, materials, weight and dimensions* | ☑ | ☐ | |
| Dichiarazioni / evidenze relative a sostanze soggette a restrizione (es. metalli pesanti, PFAS ove applicabili)<br>*Declarations / evidence concerning restricted substances (e.g. heavy metals, PFAS where applicable)* | ☑ | ☐ | |
| Informazioni / evidenze relative al contenuto di materiale | ☐ | ☑ | |

| | | | |
|---|---|---|---|
| riciclato, se applicabile<br>*Information / evidence concerning recycled content, where applicable* | | | |
| Informazioni / evidenze relative alla riciclabilità<br>*Information / evidence concerning recyclability* | ☑ | ☐ | |
| Rapporti di prova / analisi di laboratorio, se disponibili<br>*Test reports / laboratory analyses, if available* | ☐ | ☑ | |
| Certificazioni o altre evidenze tecniche, se disponibili<br>*Certifications or other technical evidence, if available* | ☑ | ☐ | |
| Informazioni relative all'identificazione / etichettatura dell'imballaggio<br>*Information concerning packaging identification / labelling* | ☑ | ☐ | |
| Altra documentazione tecnica pertinente<br>*Other relevant technical documentation* | ☐ | ☑ | |

## 3. VERIFICA DOCUMENTALE / *DOCUMENT REVIEW*

**Esito / *Outcome:***

☑ Documentazione adeguata ai requisiti applicabili / *Documentation adequate for applicable requirements*

☐ Documentazione da integrare / *Documentation to be supplemented*

☐ In attesa di documentazione dal fornitore / *Awaiting supplier documentation*

**Eventuali note / integrazioni richieste / *Notes / additional documentation required:***

| **Verificato da / *Reviewed by:*** | **Data / *Date:*** | **Firma / Sigla / *Signature / Initials:*** |
|---|---|---|
| Chiara Borellini | 25/09/2026 | |

**Elenco articoli di magazzino**

| Codice Articolo | Descrizione |
|---|---|
| 50110912 | XS REVio Multiparametro portatile - Elettrodo 201 T - Cella 2301 T - Sen |
| 50110922 | XS REVio Multiparametro portatile - Elettrodo 201 T - Sensore polarograf |
| 50110932 | XS REVio Multiparametro portatile - Senza sensori |
| 50110942 | XS REVio Multiparametro portatile - Cella 2301 T - Sensore polarografic |
| 50110952 | XS REVio Multiparametro portatile - Elettrodo 201 T DHS - Cella 2301 T - |
| 50110962 | XS REVio Multiparametro portatile - Solo strumento |
| 50110982 | XS REVio Multiparametro portatile - Elettrodo 201 T - Cella 2301 T - Sen |
| 50110992 | XS REVio Multiparametro portatile - Elettrodo 201 T - Cella 2301 T - |

## Regulatory Data Sheet

Copyright,2026, 3M Company.
All rights reserved. Copying and/or downloading of this information for the purpose of properly utilizing 3M products is allowed provided that: (1) the information is copied in full with no changes unless prior written agreement is obtained from 3M, and (2) neither the copy nor the original is resold or otherwise distributed with the intention of earning a profit thereon.

This Regulatory Data Sheet is provided as a courtesy in response to a customer request.

| | | | |
|---|---|---|---|
| **Document Group:** | 23-2368-1 | **Version Number:** | 24.08 |
| **Issue Date:** | 05/01/26 | **Supersedes Date:** | 03/02/26 |

# 3M™ Thermal Transfer Label Material 7871

3M
Industrial Adhesives and Tapes Division
3M Center, St. Paul, MN 55144-1000, USA
1-888-3M HELPS (1-888-364-3577)

**RDSs are available at www.3M.com**

### Regulations and Industry Standards

**SDS (US OSHA)**
This product is an article and therefore is not subject to the requirements of the US Occupational Safety and Health Administration's (OSHA) Hazardous Communications Standard 29 CFR 1910.1200(b)(6)(v) to provide a Safety Data Sheet (SDS).
**China RoHS**
This product or part does not exceed the maximum concentration values (MCVs) in China RoHS GB/T 26572-2011/AMD No. 1 (Requirements of Concentration limits for certain restricted substances in electrical and electronic products), which means that each of the homogeneous materials within this product is below the following MCVs: (a) 0.1% (by weight) for lead and its compounds, mercury and its compounds, hexavalent chromium and its compounds, polybrominated biphenyls, polybrominated diphenyl ethers, di(2-ethylhexyl) phthalate, butyl benzyl phthalate, dibutyl phthalate, or diisobutyl phthalate; and (b) 0.01% (by weight) for cadmium and its compounds.
**CONEG**
This product complies with the US CONEG (Coalition of Northeastern Governors) Model Toxics in Packaging Legislation as there is no intentionally added lead, cadmium, hexavalent chromium or mercury, and the sum total concentration of these substances in the product does not exceed 100 ppm by weight.
**Conflict Minerals**
Conflict Minerals, which the U.S. Securities and Exchange Commission ("SEC") has defined as gold, columbite-tantalite (coltan), cassiterite, wolframite, or their derivatives (tin, tantalum, or tungsten), are not contained in or are not "necessary to the functionality or necessary to the production" of the above-listed product, as the term "necessary to the functionality or the production" is defined under the SEC's Conflict Minerals Rule. 77 Fed. Reg. 56274 (Sept. 12, 2012).
**EU Fluorinated Greenhouse Gas**
The product is not known to contain a Fluorinated Greenhouse Gas (or F-GAS) listed in Annexes I, II and III of Regulation (EU) No 2024/573 of the European Parliament.
**EU REACH**
Substances listed in Annex XIV of Regulation No 1907/2006 of the European Parliament and the Council concerning the

Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) are not intentionally added to this product.

**EU REACH**

This product, including any article that the product is composed of, does not contain at greater than 0.1% by weight a Substance of Very High Concern (SVHC) substance identified according to Article 59 of REACH. This declaration reflects the substances on the candidate SVHC list, effective February 2026.

**EU REACH**

This product or part is known to contain a substance listed in Annex XVII. *"This product or part is known to contain a substance listed in Annex XVII of Regulation No 1907/2006 of the European Parliament and the Council concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH).*
*As 3M has placed the product on the market, it is done so in accordance with EU REACH restrictions listed in column 2 of Annex XVII of Regulation (EC) No. 1907/2006.*
*Please contact us if your downstream use falls under one or more of the listed below.*
*Product is not intended to be used as or as part of clothing or toys.*
*For more information on downstream conditions of use, consult the following Entries: 48*
*Please note: Excluded from the Annex XVII declaration are substances covered by entries 3, 40, 75 and 78.*
*For details consult: Substances restricted under REACH - ECHA (europa.eu).*
*If your downstream use is in scope of any of these entries, please contact us."*

**EU RoHS**

This product does not exceed the maximum concentration values (MCVs) set under EU Directive 2011/65/EU (RoHS recast/RoHS 2), as stated in Annex II to that directive. This means that each of the homogenous materials within this product does not exceed the following MCVs: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; and (b) 0.01% (by weight) for cadmium.

**EU RoHS Phthalates**

This product does not exceed the maximum concentration values (MCVs) for phthalates set under EU Directive 2011/65/EU (RoHS recast/RoHS 2), as amended by EU 2015/863, which applies to finished EEE after July 22, 2019 for Category 1-7, 10-11 products and after July 22, 2021 for Category 8 and 9 products. This means that each of the homogeneous materials within this product does not exceed the MCV of 0.1% (by weight) for each of the following phthalates: DEHP, BBP, DBP, and DIBP.

**GADSL**

This product contains a Declarable or Prohibited substance(s) that is present at or above the reportable threshold levels in the Global Automotive Declarable Substance List (GADSL). This declaration reflects the substances on the list as of the date of this certificate. *7871 : 3M(TM) Thermal Transfer Imprintable Film Label Material 7871 is available in the public domain of IMDS as a Semi-Component Module entry with ID 405933841.*

**Halogens – IEC 61249-2-21**

This product meets the non-halogenated permissible limits of the International Electrotechnical Commission (IEC) 61249-2-21 standard as having less than 900 ppm bromine, less than 900 ppm chlorine, and less than 1500 ppm total bromine and chlorine.

**Stockholm Agreement**

This product does not contain Persistent Organic Pollutants (POPs) at or above applicable thresholds per Annexes A, B, and C of the Stockholm Convention, May 2004 and subsequent amendments.

**Sustainability Advantage: Recycled content**

This product does not contain recycled content.

**TSCA Section 6**

This product is not known to contain 2,4,6-Tri-tert-butylphenol (CAS 732-26-3).

**TSCA Section 6**

This product is not known to contain Decabromodiphenyl Ether (Deca-BDE) (CAS 1163-19-5).

**TSCA Section 6**

This product is not known to contain Hexachlorobutadiene (HCBD) (CAS 87-68-3).

**TSCA Section 6**

This product is not known to contain Pentachlorothiophenol (PCTP) (CAS 133-49-3).

**TSCA Section 6**

This product is not known to contain Phenol, isopropylated phosphate (3:1) (PIP (3:1)) (CAS 68937-41-7).

## Chemicals and/or Compounds of Interest

**Asbestos** : Not known to contain.
**Bisphenol A (BPA) (CAS 80-05-7)** : Not known to contain.
**Bisphenol S (BPS) (CAS 80-09-1)** : Not known to contain.
**Cobalt and (Co) Compounds** : Not known to contain.
**Gallium (CAS 7440-55-3)** : Not known to contain.
**Germanium (CAS 7440-56-4)** : Not known to contain.
**Materials of Human or Animal Origin** : Not known to contain. *Not reviewed for health care applications involving patient contact, or for applications involving food.*
**Medium-chained chlorinated paraffins, C14-C17 (MCCP)** : Not known to contain.
**Mercury and (Hg) Compounds** : Not known to contain.
**Mica** : Not known to contain.
**Natural Rubber Latex** : Not known to contain.
**Ozone Depleting Chemicals (ODCs)** : Not known to contain.
**Rare Earth Elements (REE) or Rare Earth Metals (REM)** : Not known to contain.
**Talc (CAS 14807-96-6)** : Not known to contain.

## Per- and Polyfluoroalkyl Substances (PFAS)

PFAS refers to a broad range of thousands of materials with varying properties and characteristics, which may include high resistance to oil, water, temperature, chemicals, and fire, which makes certain PFAS critical to the functioning of many modern products.

**Per- and polyfluoroalkyl substances (PFAS)** : Not intentionally added.
**Perfluorohexane sulfonate (PFHxS)** : Not intentionally added.
**Perfluorohexanoic acid (PFHxA) (CAS 307-24-4)** : Not intentionally added.
**Perfluorooctanesulfonic Acid (PFOS) (CAS 1763-23-1)** : Not intentionally added.
**Perfluorooctanoic Acid (PFOA) (CAS 335-67-1)** : Not intentionally added.

## Definitions

*Note: all Definitions take Disclaimers into account and apply to the "Chemicals and/or Compounds of Interest" and/or "Per and poly-fluoroalkyl Substances (PFAS)" sections only*

| Terms | Definitions |
|---|---|
| Contains* | Present based on composition information disclosed by 3M suppliers, analytical testing, or both. |
| Not known to contain* | 1. Analytical measurement for presence is not currently available;<br>2. If measurement is possible,<br>a) The material has not been identified or disclosed to 3M and<br>b) The material has not been specifically quantified or detected; OR<br>c) Based on information from raw material suppliers, possible presence as an impurity or by-product at or below regulatory thresholds (e.g., 0.1 or 0.01 %) |
| Intentionally added** | Desired in the final product to provide a specific characteristic, appearance, or quality and/or to perform a specific function. |
| Not intentionally added** | By-product(s), impurity(ies) and/or unintended artifact(s) resulting from the formulation and/or manufacture of a material. |
| By-product*** | A chemical substance produced without a separate commercial intent during the manufacture, processing, use, or disposal of another chemical substance or mixture. |
| Impurity*** | A chemical substance which is unintentionally present with another chemical substance (e.g., residuals, catalysts, process solvents). |

**Terms apply to the Chemicals and/or Compounds of Interest Section only (if section is present)*
***Terms apply to the PFAS Section only (if section is present)*
****Terms apply to both the Chemicals and/or Compounds of Interest and PFAS Sections (if section(s) are present)*

Disclaimers: The information provided in this document related to material content represents 3M's knowledge and belief, which may be based in whole or in

part on information provided by suppliers to 3M. This is intended to answer commonly asked questions about 3M products and is not intended to be a comprehensive listing of all substances that may be of interest or that may be regulated in this or other 3M products, nor is it intended to be a comprehensive summary of any and all regulations that may apply to this product. Where substances are listed, their listing does not infer or constitute a judgment as to their safety, environmental or health impacts. Information is supplied upon the condition that the persons receiving the same will make their own determination as to its suitability for their purposes prior to use. Customers are encouraged to consult with legal and regulatory experts to determine applicable regulations in light of intended use of the product.

Limitation of Remedies and Liability: In the event any Product is proven not to conform with the information in this document, then to the extent permitted by law, 3M's entire liability and Buyer's exclusive remedy, will be at 3M's option either: (i) replacement of Product with a conforming product, or (ii) refund of the purchase price paid by Buyer for each non-conforming Product, within a reasonable time after written notification of said non-conformance and return of said Product to 3M. 3M shall not under any circumstances be liable for direct, incidental, special, or consequential damages (including but not limited to loss of profits, revenue, or business) related to or arising out of this certification, including, the use, misuse or inability to use the Product. Unless stated otherwise in writing, the foregoing language cannot be waived, modified, or supplemented in any manner whatsoever.

# Technical Data Sheet

3M™ Thermal Transfer Polyester Label Material 7871

Additional Info

Regulatory Info/SDS

## Product Description

3M™ Thermal Transfer Polyester Label Material 7871 is a gloss polyester label material that offers durability and moisture resistance. This label product utilizes 3M™ High Performance Acrylic Adhesive 350, it offers chemical resistance and holding strength even at high temperatures.

## Product Features

• Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals.
• Thick adhesive caliper provides for stronger bond on textured surfaces.
• Facestock is topcoated for thermal transfer printing. Resin ribbons are recommended for optimum durability. The topcoat also provides improved ink anchorage for traditional forms of press printing.
• UL recognized (File MH16411) and CSA accepted (File 99316). See the UL and CSA listings for details.
• UL listing includes approval for use on powder coated surfaces.
• 3M™ Thermal Transfer Polyester Label Material 7871 meets British Standard BS-5609.

## Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

## Typical Physical Properties

| Attribute Name | Value |
|---|---|
| Adhesive Type | 350 Acrylic |
| Facestock | White Polyester Gloss TC |
| Adhesive Coat Weight | 2.70 — 3.24 g/100 in² |

| Attribute Name | Value |
|---|---|
| Adhesive Thickness | 0.046 mm (1.8 mil) |
| Facestock Thickness | 0.051 mm (2 mil) |
| Liner | 55# Densified Kraft |
| Liner Thickness | 0.081 mm (3.2 mil) |

| Attribute Name | Value |
|---|---|
| Convertability | In order to capture the superior performance properties of 3M™ High Holding Acrylic Adhesive 350, thicker calipers are utilized for LSE or textured substrates. Its higher caliper, while desirable for the end use applications, may require extra care during processing. Please refer to the die cutting/converting section of this data page or the “Guide to Converting and Handling Label Products” technical bulletin for additional information. |

## Typical Performance Characteristics

### 180° Peel Adhesion

Temperature: 23 °C (73 °F)
Dwell Time: 72 h
Test Method: ASTM D3330

| Substrate | Value |
|---|---|
| Polycarbonate (PC) | 9.2 N/cm (83 oz/in) [1] |
| Polypropylene (PP) | 8 N/cm (73 oz/in) [1] |
| Stainless Steel | 9.6 N/cm (87 oz/in) [1] |

[1] 300 mm/min (12 in/min)

Temperature: 23 °C (73 °F)

| Attribute Name | Test Method | Value |
|---|---|---|
| Liner Release | TLMI | 1 — 13.7 g/cm (5 — 70 g/2 in) [1] |

[1] 180° removal, 300 in/min

| Attribute Name | Value |
|---|---|
| Minimum Application Temperature | 10 °C (50 °F) |
| Long Term Temperature Resistance | 149 °C (300 °F) [1] |
| Minimum Long Term Temperature Resistance | -40 °C (-40 °F) [1] |

[1] Long Term (day, weeks)

| Attribute Name | Value |
|---|---|
| Note | Calipers are nominal values |

## Typical Environmental Characteristics

### Humidity Resistance

24 hours at 100°F (38°C) and 100% relative humidity: no significant change in appearance or adhesion

### Temperature Resistance

When applied to stainless steel. Other substrates should be tested per application.
300°F (149°C) for 24 hours: no significant visual change

-40°F (-40°C) for 10 days: no significant visual change

## Printing

Facestock is topcoated for improved ink receptivity and is designed for thermal transfer printing. It is printable by all standard roll processing methods including flexography, hot stamp, letterpress, and screen printing. Refer to UL Listing for specific ribbons.

## Converting

Rotary die cutting is recommended. Fanfolding of labels is not recommended. Small labels should be evaluated carefully. Winding tensions should be kept at a minimum to help prevent the adhesive from oozing.

## Handling/Application Information

### Application Examples

• Barcode labels and rating plates
• Property identification and asset labeling
• Warning, instruction, and service labels for durable goods
• Nameplates and durable goods

### Application Techniques

For maximum bond strength, the surface should be clean and dry. Typical cleaning solvents are heptane and isopropyl alcohol.*

For best bonding conditions, application surface should be at room temperature or higher. Low temperature surfaces, below 50°F (10°C), can cause the adhesive to become so firm that it will not develop maximum contact with the substrate. Higher initial bonds can be achieved through increased rubdown pressure.

*When using solvents, read and follow the manufacturer's precautions and directions for use.

## Industry Specifications

UL Recognized, File PGJI2.MH16411, Printing Materials - Component, ANSI/UL 969
CSA Group Certified, File 99316, Class 7922, Adhesive-Type Labels - Label Stock, CSA-C22.2 N0. 0.15-15 Update No. 1;
CSA Group Certified, File 99316, Class 7924, Adhesive-Type Labels - Label Stock, CSA-C22.2 N0. 0.15-15 Update No. 1
BS-5609

## Storage and Shelf Life

Store under normal conditions of 16° to 27°C (60° to 80°F) and 40 to 60% relative humidity in the original packaging, out of direct sunlight. For best performance, use this product within 24 months from date of manufacture.

## Available Sizes

| Attribute Name | Value |
|---|---|
| Packaging | Finished labels should be stored in plastic bags. |

## Information

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

**Disclaimer:** 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with applicable health and safety regulations and standards (e.g., U.S. OSHA, ANSI), as well as all product literature, user instructions, warnings, and limitations, and the user must take any action required under any recall, field action or other product use notice. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult your on-site safety professional, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.

## ISO Statement

This product was manufactured under a 3M quality system registered to ISO 9001 standards.

3M™ Industrial Adhesives and Tapes Division
3M Center, St. Paul, MN 55144-1000
3M.com/iatd

3M is a trademark of 3M Company.
Alconox is a registered trademark of Alconox, Inc.
Formula 409 Cleaner is a registered trademark of Clorox, Inc.
©3M 2025 (12/25)

MAX®

# TECHNICAL SHEET - SCHEDA TECNICA

MADE IN ITALY

LIFETIME LIMITED WARRANTY

## MAX430





- 464 x 366 x H176 mm
  *18.27 x 14.41 x H6.93 inch*
- 426 x 290 x H159 mm
  *16.77 x 11.42 x H6.26 inch*
- 45 + 114 mm
  1.77 + 4.49 *inch*
- 2,76 kg / *6.08 lb*
- -51 / 90 °C / *-59.8 / 194° F*
- Capacità / *Capacity*
  19.64 lt
- Stampaggio: ad iniezione
  *Process: Injection molding*
- Materiale / *Materials*
  POLIPROPILENE/*POLYPROPYLENE*
  NYLON (Serrature / *Latches*)



*Shipping & Logistic info*

2 pz. per cartone
*2 pcs. x carton*

6,20 Kg per cartone
*13.66 lb gross weight*

IP67 RATING

MILSPECS
DEF STAN 81-41
STANAG 4280
MIL STD 810H

ATA300


- Guarnizione ermetica / Watertight seal around lid
- Valvola automatica di pressurizzazione
  Automatic pressure release valve
- Sistema di impilabilità / Stackable interlocking system
- Resistenza agli urti / Thick body material
- Chiusure di sicurezza a doppio step / Easy to open double throw latches
- Manico morbido ad alta ergonomicità / Load tested soft grip handle
- Pareti spesse ANTIURTO / Thick body material
- Punti di fissaggio per varie applicazioni / Extra fixing points
- Cerniera lungo tutto il profilo della valigia / Fully length hinges
- Perni in nylon ANTI corrosione / Nylon pins corrosion free



**SCREEN PRINTING & CUSTOM LABEL**
SERIGRAFIA & ETICHETTA CUSTOM



**CUSTOMIZED FOAM INLAY**
INTERNI IN SPUGNA FUSTELLATA



**LASER MARKING OR ENGRAVING**
INCISIONE O MARCATURA LASER



**CUSTOM COLOUR**
COLORI CUSTOM

Panaro

Panaro Srl
Capitale Sociale € 104.520,00 I.V. - Registro Imprese di Modena n. 00156160368 - R.E.A.MO n.104468
C.F. 00156160368 - P.I. 00156160368 - Codice EORI IT 00156160368 - Export MO / 003846

T: +39.059.793.340 Via delle Scienze 313, 41058 - Vignola (MO) - IT www.panarocases.com | info@panarocases.com

MAX Owner of Trademark

# POLYPROPYLENE MAX

Polypropylene MAX is a nucleated and controlled-rheology copolymer with a very high Melt Flow Index of 12g/10min.
Polypropylene MAX is characterized by a good balance between rigidity and impact resistance and has excellent antistatic properties.
Polypropylene MAX has been specially developed for the injection moulding of crates.

## Characteristics

| | Method | Unit | Typical Value |
|---|---|---|---|
| **Rheological properties** | | | |
| Melt Flow Index 230°C/2.16 kg | ISO 1133 | g/10 min | 12 |
| **Mechanical properties** | | | |
| Tensile Strength at Yield | ISO 527-2 | MPa | 27 |
| Elongation at Yield | ISO 527-2 | % | 6 |
| Tensile modulus | ISO 527-2 | MPa | 1300 |
| Flexural modulus | ISO 178 | MPa | 1250 |
| Izod Impact Strength (notched) | ISO 180 | kJ/m² | |
| at 23°C | | | 13 |
| at -20°C | | | 6 |
| Hardness Rockwell - R-scale | ISO 2039-2 | | 85 |
| **Thermal properties** | | | |
| Melting Point | ISO 3146 | °C | 165 |
| Vicat Softening Point | ISO 306 | °C | |
| 50N-50°C per hour | | | 70 |
| 10N-50°C per hour | | | 140 |
| Heat Deflection Temperature | ISO 752 | °C | |
| 1.80 MPa - 120°C per hour | | | 53 |
| 0.45 MPa - 120°C per hour | | | 95 |
| **Other physical properties** | | | |
| Density | ISO 1183 | g/cm³ | 0.905 |
| Bulk Density | ISO 1183 | g/cm³ | 0.525 |

*All informations contained in this document are confidential and may not be disclosed.

# Panaro

FOAM TECHNICAL SHEET | SCHEDA TECNICA SPUGNE


## PNE-ECOCELL :

| TECHNICAL PROPRIETIES | METHOD | UNIT | VALUE |
|---|---|---|---|
| **Density** | ISO 845 | Kg/m3 | 22 (+/- 10%) |
| Presenza materiale riciclato | | % | 30 – 60 |
| **Tensile strength** | ISO 1798 | N/mm2 | |
| Extrusion direction | | | 0.25 |
| Cross direction | | | 0.15 |
| **Elongation at break** | ISO 1798 | % | |
| Extrusion direction | | | 137 |
| Cross direction | | | 112 |
| **Compressive stress** | ISO 3386/1 | N/mm2 | |
| 1st impression | | | |
| 25 % impression | | | 0,037 |
| 50 % impression | | | 0,096 |
| 70 % impression | | | 0,223 |
| 4th impression | | | |
| 25 % impression | | | 0,016 |
| 50 % impression | | | 0,058 |
| 70 % impression | | | 0,154 |
| **Compression set** | ISO 1856 | % | |
| 22 h/23°C/50 % after 2 h | | | < 25 |
| 22 h/23°C/50 % after 24 h | | | < 20 |
| **Thermal stability** \| 24 h/70 °C | ASTM D-3575-S | % | < 10 |
| **Compressive Creep** \| 1.0 psi/168 h/23°C | ASTM D-3575-BB | % | < 10 |


I valori citati, riportati come da informazioni fornite dal produttore, non sono da considerare come valori assoluti, ma come indicazioni destinate a guidare la scelta del materiale in funzione dell'utilizzo finale.





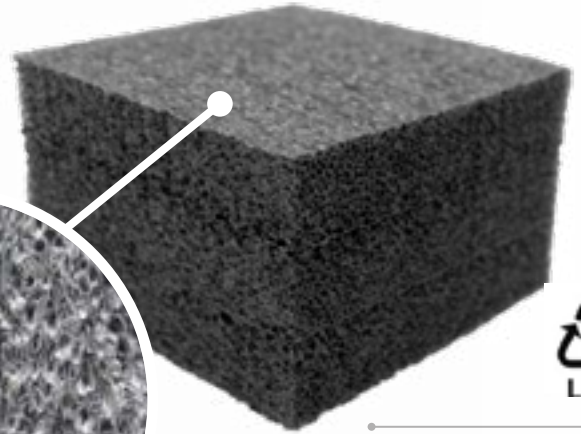

4
LDPE





PANAROCASES.COM