
Via della Meccanica, 25, 41012 Carpi (MO) - Italy
+39 059 653274 - info@giorgiobormac.com

# XS REVio Portable multiparameter meter - Cell 2301 T - Polarographic sensor - Without electrode

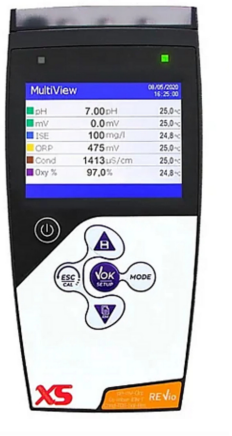


Code: *50110942*

## TECHNICAL DATA SHEET

| | |
|---|---|
| Supplied as standard | 3-hole field stand for electrodes, coloured buffer solutions, USB cable, power supply, user manual and IP67 carrying case. |

### Performance

| | |
|---|---|
| Parameters | pH, mV, ORP, ISE, Conducibilità, TDS, Salinità, Resistività, Ossigeno disciolto, Temperatura. |
| pH measuring range | -2,00 ... +20,00 |
| Accuracy (pH) | ±0,002 |
| pH resolution | 0,1 / 0,01 / 0,001 |
| Recognised pH buffers | USA - NIST - DIN 19266 |
| PH calibration points | 1...5 automatic values - 5 custom values |
| Criteria for stability of the measure | Low - Med - High (pH) |
| pH alarms settings | Yes |
| pH electrode status indication | Yes |
| EC measuring range | 0,01 µS .... 1000 mS |
| EC accuracy | ± 1% f.s. |
| EC Resolution | 0,01 / 0,1 / 1 µS/cm (scala automatica) µs/cm |
| EC recognised buffers | 84 µS - 147 µS - 1413 µS - 12,88 mS - 111,8 mS |
| EC calibration points | 1...4 automatic values / 1 custom value |
| Display | 0,1 / 1 / 10 |
| Coefficiente di temperatura | 0,00 ... 10,00 |
| Reference temperature | +15 ... +30 |
| Temperature compensation | 0,0...100,0 |
| TDS measuring range | 0.1 mg/l ... 500 g/l |
| TDS accuracy | ±1 % f.s. |
| TDS factor | 0.40 ... 1.00 |
| Salinity measuring range | 0,01 ppt ... 100 ppt |

Via della Meccanica, 25, 41012 Carpi (MO) - Italy
+39 059 653274 - info@giorgiobormac.com

| | |
|---|---|
| Salinity accuracy | ±1 % f.s. |
| Salinity compensation | Yes |
| mV / ORP measuring range | -2000 ... +2000 |
| ORP resolution | 0,1 / 1 |
| ORP calibration points | 1 |
| temperature measurement range | -30 ... +130,0 |
| Temperature accuracy | ±0,2 °C |
| Temperature resolution | 0,1 °C |

## Features

| | |
|---|---|
| Display | High-definition, backlit colour TFT |
| Inputs | 3 pairs BNC - RCA - Banana 4 mm Ref |
| PC connection | Micro USB |
| Calibration Report | Yes |
| AQA | Yes |
| DHS compatibility | Yes |
| Memory | 10.000 data |
| Automatic brightness control | Yes |
| Password | Yes, 4 numeric characters |
| Languages | Eng - Ita - Deu - Esp - Fra - Cze |

## Feeds

## Dimensions and weight

| | |
|---|---|
| Dimensions (WxDxH) | 185 x 85 x 45 mm |
| Weight | 0.45 |

## Standards applied

| | |
|---|---|
| Regulations | CE |