
Via della Meccanica, 25, 41012 Carpi (MO) - Italy
+39 059 653274 - info@giorgiobormac.com

Mini 1 Way LCD PDF (1 x 10pcs) programmable alarm thresholds on request

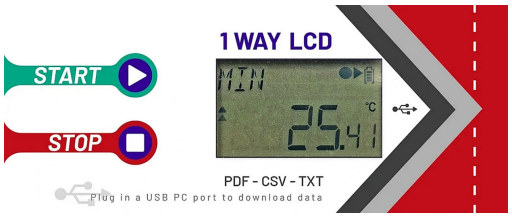

Code: *70101043*

TECHNICAL DATA SHEET

Performance

Temperature accuracy	±0,3 (-10 ... +40 °C), ±0,5 oltre °C
Measuring range	from 5 sec. to 24 hours
temperature measurement range	-40 ... +80
Temperature Resolution	0,01 °C
Working temperature	-40 ... +80 °C
Response time	T90 ~ 7 min in air

Features

Compliance	CE, RoHS
IP rating	67 IP
Display	Multi-function reflective LCD display, 30 x 17 mm
Memory	20000 measurements
Sensor	Internal NTC

Feeds

Battery life	3 V CR2032
Battery life	CR2032
Battery life	1 year

Dimensions and weight

Weight	0.017 kg